
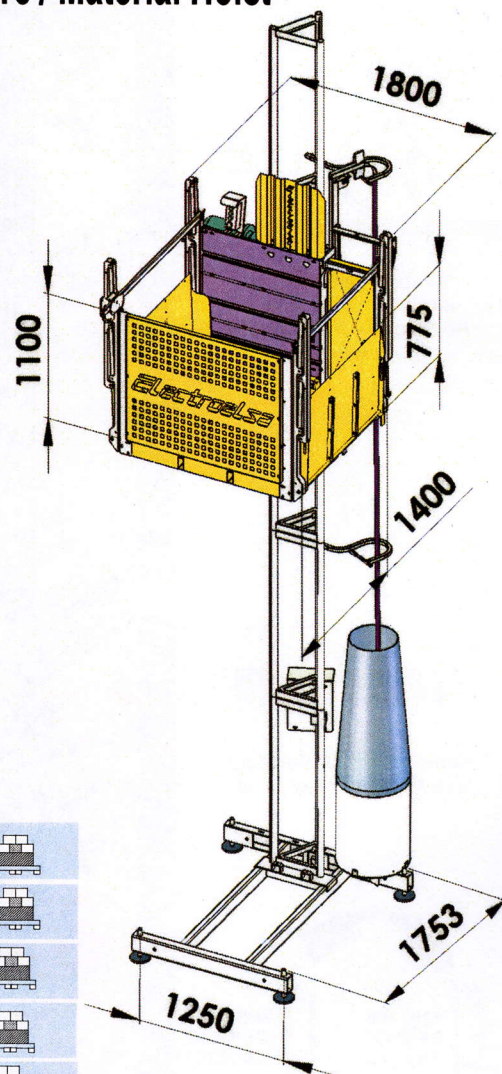


EHPM 400-500 EHM 400-500

Piattaforma di Trasporto / Transport Platform Montacarichi da cantiere / Material Hoist

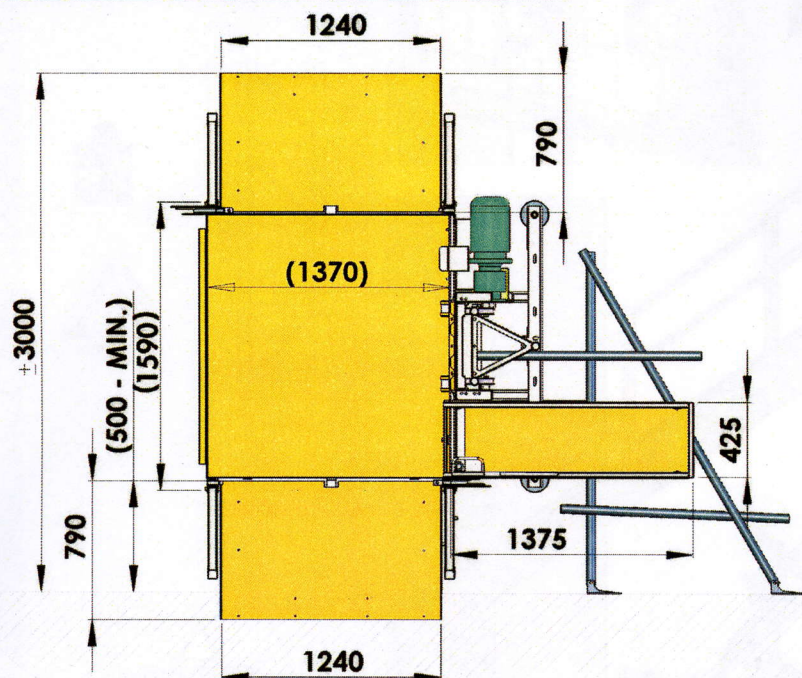

EHPM 400 monofase		EHPM 500 trifase	
	400 kg		500 kg
	+ 300 kg		+ 400 kg
	+ 200 kg		+ 300 kg
	+ 100 kg		+ 200 kg
			+ 100 kg

Dati Tecnici	Technical Data	Données Techniques	Datos Tecnicos	EHPM 400 EHM 400 monofase	EHPM 500 trifase	EHPM 500 trifase
Capacità di carico	Capacity	Charge nominale	Capacidad de carga	400 kg	500 kg	500 kg
Velocità di sollevamento	Lifting speed	Vitesse de levage	Velocidad de elevación	12 m/min	12 m/min	20 m/min
Massima altezza ancorata	Max anchored height	Hauteur max avec ancrages	Altura max con anclajes	120 m	120 m	120 m
Dimensioni interne cesta	Platform dimensions	Dimensions du plancher	Dimensiones de cabina	1590 x 1370 mm	1590 x 1370 mm	1590 x 1370 mm
Tensione alimentazione	Input power range	Tension d'alimentation	Tensión de red	220/50 Hz 230/60 Hz	380/50 Hz 415/60 Hz	380/50 Hz 415/60 Hz
Interruttore protezione linea	Protection switch	Interrupteur de protection	Interruptor de protección	16 A	16 A	16 A
Potenza servizio continuo	Power of the motors	Puissance des moteurs	Potencia de motorreductores	1 X 2,2 kW	1 X 2,2 kW	1 X 3 kW
Corrente di spunto	Starting current	Ampérage au démarrage	Intensidad de arranque	108 A	45 A	56 A
Minima potenza di linea consigliata	Minimum line power required (suggested)	Min. puissance de ligne conseillée	Min. potencia línea	3 kW	4,5 kW	4,5 kW