


30
YEARS
1974 - 2004



▶ BERTA ADVANCED

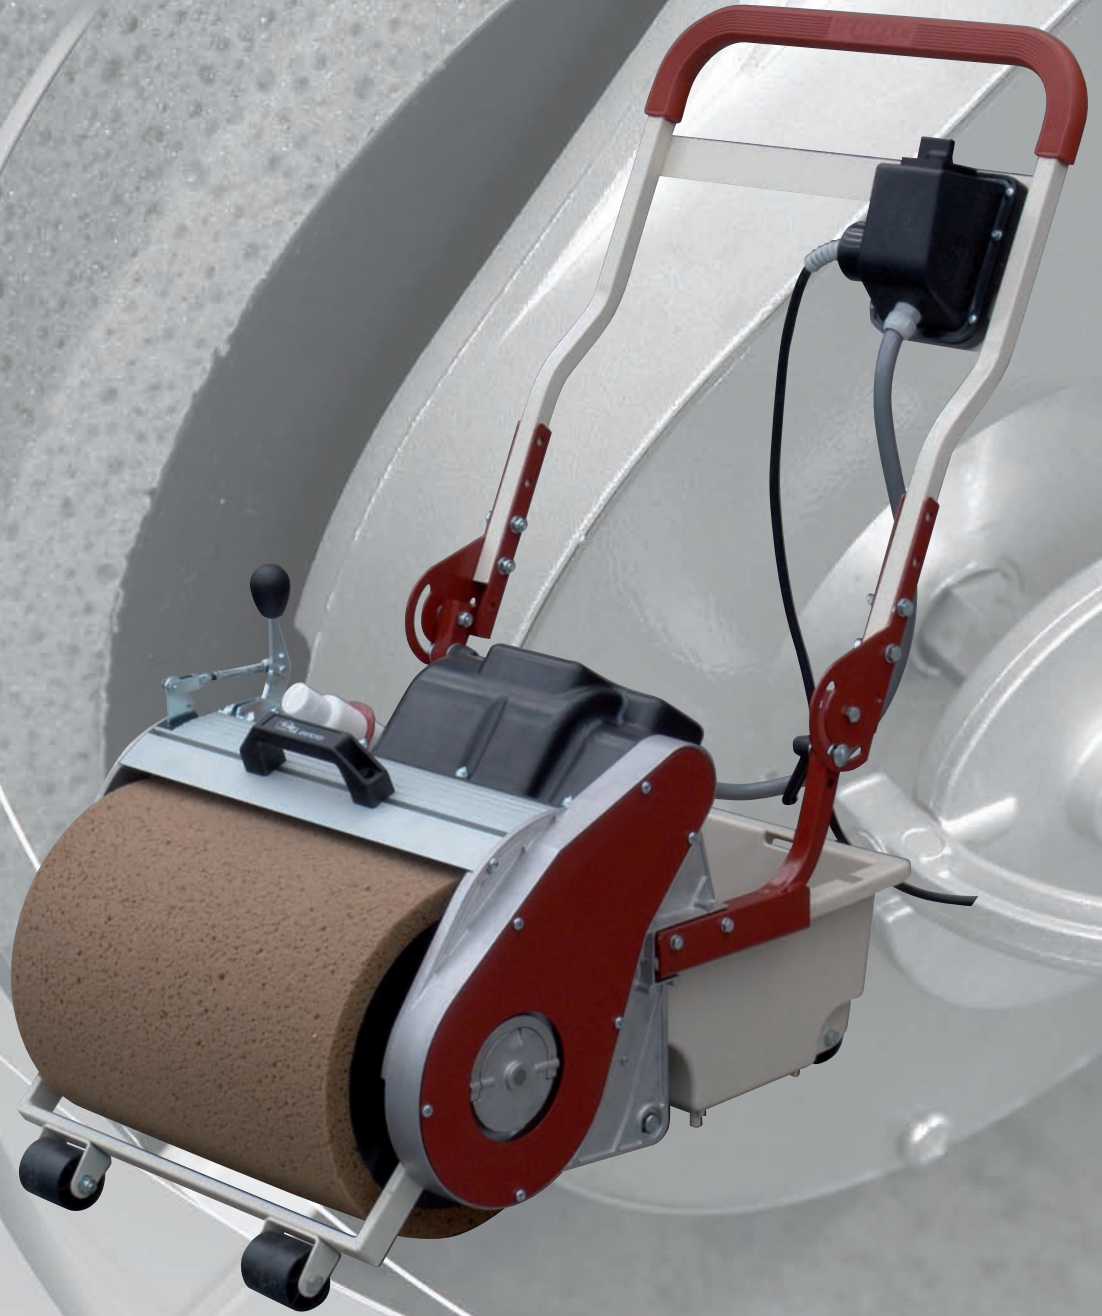


RAIMONDI
S.p.A.

macchine ed attrezzature per posa pavimenti
machines and tools for tile - stone installation

BERTA ADVANCED



New




UTENSILI APPLICABILI




CARATTERISTICHE TECNICHE




OPTIONAL




IMBALLI




PACKAGE



ACCESSORIES



AVAILABLE SPONGES



TECHNICAL CHARACTERISTICS



- Elettrospugna per la pulizia di pavimenti in cotto toscano, gres porcellanato, bi-monocottura, marmo, Klinker, porfido, pietre naturali, ecc. dal prodotto sigillante (base cemento o resine epossidiche) in fase di sigillatura.
- Non vuota le fughe. Facilmente manovrabile, idonea anche per utilizzo in piccole superfici.
- Resa 100 m²/ora su superfici di media difficoltà.
- Durata rullo spugna da 150 a 2000 m².
- Rullo spugna di facile sostituzione grazie ai dispositivi magnetici di innesto rapido.
- Corpo in alluminio pressufuso ed estruso per minimizzare il peso e garantire la massima durata nel tempo.
- Possibilità di regolare il livello di umidità del rullo spugna.
- Dispositivo per spremitura rullo spugna e simultaneo sollevamento delle ruote anteriori.
- Alimentazione acqua al rullo con nastro frangibile.
- Manico pieghevole e ad inclinazione ed altezza variabile con impugnatura ergonomica.
- Vasca (15 litri) facilmente estraibile in plastica antiurto, con ruote.
- Corredo: rullo spugna per sigillanti a base cemento, liquido antischiuma, manuale uso e manutenzione.

- Electro sponge for cleaning grout (cement based or epoxy resin) from floors: Terracotta, porcelain, double-fired and single-fired tiles, marble, clinker, porphyry, natural stone, quarry tile, treaded tile, etc. during the grouting phase.
- Does not pull grout from the joints. Easy handling, suitable for use even in small areas.
- Performance: 100 sm/h for medium difficulty surfaces (800 - 1500 s.f. per hour in general).
- Sponge rollers can last from 150 to 2000 sm (1600 - 21000 s.f.).
- Easy-to-replace sponge roller thanks to the magnetic "quick clutch" system.
- Moisture level of the sponge roller is adjustable via the new pressure adjustment lever.
- Easy-to-use pressure adjustment lever also adjusts the front wheels.
- Die cast aluminum body reduces weight while increasing overall strength.
- Water is fed to the roller via a foam-reducing belt (no pump to clog up).
- The handle folds down for transport or storage, and its ergonomic design are fully adjustable for height and angle according to the user(s) needs.
- Easy-to-remove water-tank (15 liters, 4 gal.) is made of impact resistant plastic to reduce breakage.
- Standard with: sponge roller for cement based grout, anti-foaming liquid, user and maintenance manual.

MODELLI E SPECIFICHE - MODEL SPECIFICATIONS

Articolo / Part No.	Barcode	Box	Lightning Bolt	M	Motor 1	Motor 2	Roller	Roller
399ADV	8024648017666	1	230 V 50/60 Hz	Monofase/Single-phase	0,16 HP / 0,12 kW	2800/3360	Spugna "Avana"	21 / 25
399ADVGB	8024648017765	1	110 V 50 Hz	Monofase/Single-phase	0,16 HP / 0,12 kW	2800		21
399ADVUS	8024648017680	1	110 V 60 Hz	Monofase/Single-phase	0,16 HP / 0,12 kW	3360		25

DIMENSIONI E PESI / DIMENSIONS AND WEIGHT

Modello / Model	Machine	Weight	Dimensions	Weight	Dimensions
BERTA ADVANCED		29 kg / 64 lbs	68x50xh 54 cm / 26 5/8" x 19 5/8" x h 21 1/4"	32 kg / 70.5 lbs	73x60xh 55 cm / 29"x23 3/8"xh 21 1/2"



Via dei Tipografi, 11
41100 Modena (Italy)

tel. +39 059 280 888
fax +39 059 282 808

www.raimondiutensili.it
raitutens@raimondiutensili.it