



MOTORE

Motore benzina

Marca e tipo	HONDA GX270
Cilindri e cilindrata	monocilindrico da 270 cm ³
Potenza lorda max	9 HP a 3600 g/1'
Regime di taratura	3500 g/1'
Avviamento elettrico	opzionale

Motore diesel

Marca e tipo	Yanmar L100AE
Cilindri e cilindrata	monocilindrico da 406 cm ³
Potenza lorda max	10 HP a 3600 g/1'
Regime di taratura	3500 g/1'
Avviamento elettrico	di serie



IMPIANTO IDRAULICO

Pompe: n. e tipo	3 ad ingranaggi da 4 cm ³
Portata	l/1' 15
Pressione	bar 150



CARRO

Tendicingolo a grasso, riduttori epicicloidali con motore orbitale.	
Larghezza cingolo	mm 180
Rulli di sostegno per lato	3 + slitta
Velocità di traslazione	Km/h 2,1 - 3,4
Allargamento idraulico opzionale	mm 750 / 1050



RIFORMIMENTI

Serbatoio olio	l 20
Serbatoio benzina	l 6
Serbatoio gasolio	l 3,5



PESO OPERATIVO

Peso operativo escluso operatore (carro fisso)	Kg 400
Peso operativo escluso operatore (carro allarg.)	Kg 460

PRESTAZIONI:

Portata (compreso kit)	kg 850
------------------------------	--------

DOTAZIONI STANDARD:

- Seconda velocità di traslazione
- Attacchi idraulici rapidi per kit
- Pedana antiscivolo

KIT DISPONIBILI:

- Pianale agricolo
- Cassone edile
- Cassone autocaricante
- Escavatore
- Spray
- Spaccalegna
- Verricello
- Betoniera
- Lama livellatrice



ENGINE

Gasoline engine

Brand and model	HONDA GX270
No. cylinders/cubic displacement	one-cylinder 270 cm ³
Max power	9 HP - 3600 g/1'
RPM	3500 g/1'
Electric starting	optional

Diesel engine

Brand and model	Yanmar L100AE
No. cylinders/cubic displacement	one-cylinder 406 cm ³
Max power	10 HP - 3600 g/1'
RPM	3500 g/1'
Electric starting	standard



HYDRAULIC SYSTEM

Pumps: No. and type	3 by gears - 4 cm ³
Capacity	l/1' 15
Pressure	bar 150



UNDERCARRIAGE

Track tension by grease, planetary gear-box with hydraulic orbital motor.	
Rubber track width	mm 180
No. rollers per side	3 + upper guide
Translation on speed	Km/h 2,1 - 3,4
Optional hydraulic widening	mm 750 / 1050



PROVISIONS

Oil tank	l 20
Diesel tank	l 6
Gasoline tank	l 3,5



OPERATING WEIGHT

Operating weight without operator (fixed width undercarriage)	Kg 400
Operating weight without operator (variable width undercarriage)	Kg 460

PERFORMANCES:

Loading capacity (with kit)	kg 850
-----------------------------------	--------

STANDARD EQUIPMENT:

- Second translation speed
- Hydraulic quick couplings for the kit
- Antisliding footboard

AVAILABLE KITS:

- Farm bed
- Dumper bed
- Self-loading dumper bed
- Mini-excavator
- Spray
- Log splitter
- Winch
- Concrete mixer
- Levelling blade

OPTIONAL





KIT CASSONE AUTOCARICANTE SELF-LOADING DUMPER BED KIT




HP850

Capacità cassone • Skip's capacity	m ³ 0,35
Portata utile • Loading capacity	kg 750
Peso kit • Weight of the kit	kg 190

HP1100*

Capacità cassone • Skip's capacity	m ³ 0,45
Portata utile • Loading capacity	kg 890
Peso kit • Weight of the kit	kg 210

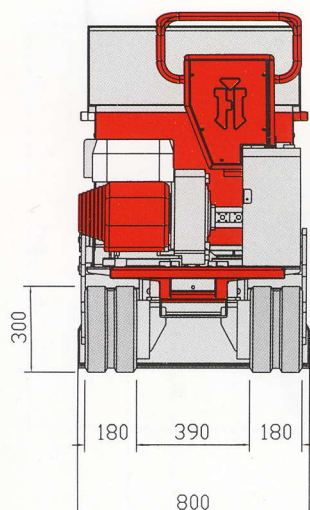

* (860) = option HP1100

